



# Cleanline Cylinder Sensors


## Electronic Type Sensors

**Contact Type:** PNP (N.O)  
**Cable:** 3 x 0.14 mm<sup>2</sup>  
**Switching capacity:** Max. 4 W  
**Switching voltage:** 5-30 V DC  
**Switching current:** Max. 200 mA  
**Voltage drop:** 0.7 V  
**Switching time:** 0.8 μs  
**Switching rate:** Max. 1 kHz  
**Service life:** 10<sup>11</sup> operations, depending on the load  
**Temperature range:** -5°C to +75°C Protection class: IP67  
**Status indicator:** LED  
**Housing material:** Plastic

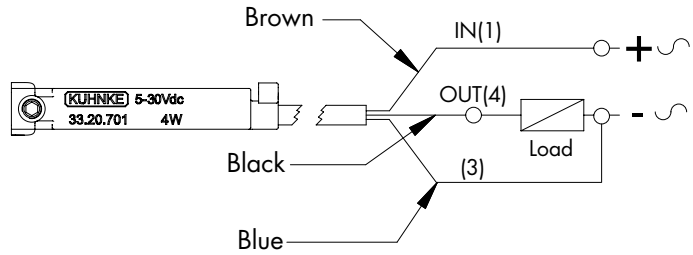

Code	Description
33.20.701	with cable L = 2000 mm
33.20.781	socket M8, cable L = 300 mm

### Dimensional drawings

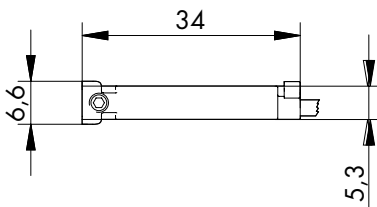

### M8 connecting leads

Code	Description
PL08B3.V250.30	cable L = 3000 mm
PL08B3.V250.50	cable L = 5000 mm

**Impulse Automation Limited**  
**United Kingdom**  
**Company Registration 665193**

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.