


Cleanline Cylinder Sensors

REED Type Sensors 2 & 3 Wires


Position Transmitter REED (3 wires)

Contact type: N.O.
Cable: 3 x 0.14 mm²
Switching capacity: Max. 6 W
Switching voltage: 5-30 V AC/DC
Switching current: Max. 500 mA
Voltage drop: 0.1 V
Switching time: 0.6 ms
Switching rate: Max. 400 Hz
Service life: 10⁷ operations, depending on the load
Temperature range: -5°C to +75°C Protection class: IP67
Status indicator: LED
Housing material: Plastic

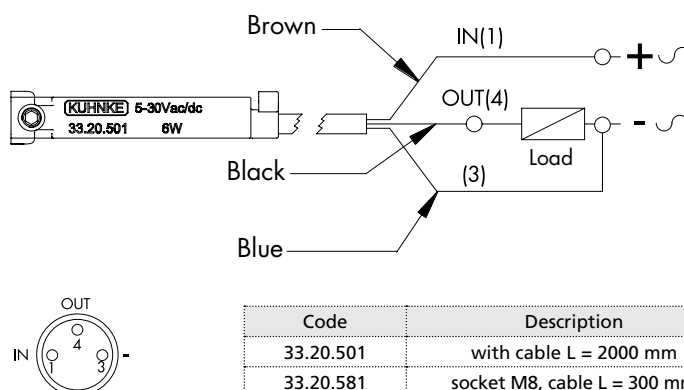


Position Transmitter REED (2 wires)

Contact type: N.O.
Cable: 2 x 0.14 mm²
Switching capacity: Max. 6 W
Switching voltage: 5-50 V AC/DC
Switching current: Max. 200 mA
Voltage drop: 3 V
Switching time: 0.6 ms
Switching rate: Max. 400 Hz
Service life: 10⁷ operations, depending on the load
Temperature range: -5°C to +75°C Protection class: IP67
Status indicator: LED
Housing material: Plastic

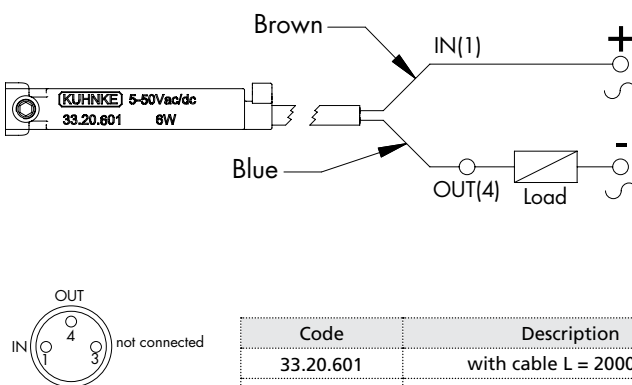

Dimensional drawings

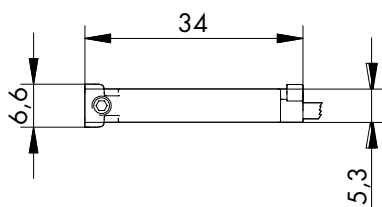

M8 connecting leads

Code	Description
PL08B3.V250.30	cable L = 3000 mm
PL08B3.V250.50	cable L = 5000 mm