



ISO 6432 CETOP Cylinder Sensors

Electronic Type Sensors


Contact Type: PNP (N.O)
Cable: 3 x 0.14 mm²
Switching capacity: Max. 4 W
Switching voltage: 5-30 V DC
Switching current: Max. 200 mA
Voltage drop: 0.7 V
Switching time: 0.8 μs
Switching rate: Max. 1 kHz
Service life: 10¹¹ operations, depending on the load
Temperature range: -5°C to +75°C Protection class: IP67
Status indicator: LED
Housing material: Plastic

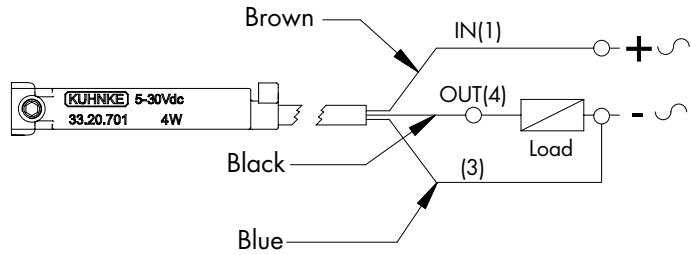

Code	Description
33.20.701	with cable L = 2000 mm
33.20.781	socket M8, cable L = 300 mm

Order fastening clamps separately.

Dimensional drawings

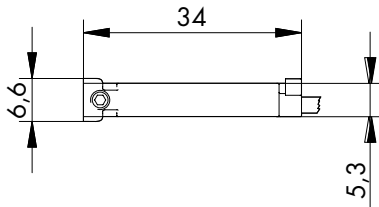

M8 connecting leads

Code	Description
PL08B3.V250.30	cable L = 3000 mm
PL08B3.V250.50	cable L = 5000 mm

Fastening clamps

∅	Code
8	33.008.23.01
10	33.008.24.01
12	33.008.25.01
16	33.008.26.01
20	33.008.27.01
25	33.008.28.01

Impulse Automation Limited
United Kingdom
Company Registration 665193