

Logic Valves & Flow Control

Pneumatic Sleeve Shut-Off Valve


Technical information

Pressure range: 2 - 8 bar
Temperature range: -18°C...+70°C
Materials: Nickel plated brass
Sleeve: Anodised aluminium
Seal: NBR
Operating medium: 5 micron filtered, lubricated or non-lubricated compressed air.



Description	Ports	Order code
Sleeve valve	G1/8	VM08
Sleeve valve	G1/4	VM04
Sleeve valve	G3/8	VM03
Sleeve valve	G1/2	VM02

Dimensional drawings

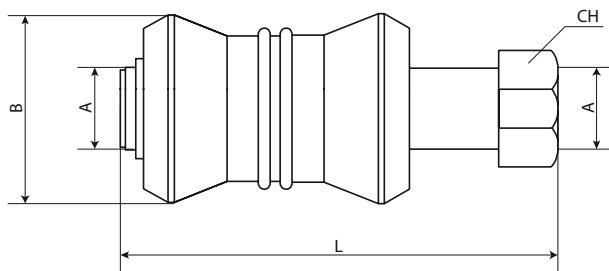

A	B	L	CH
1/8	25	48	14
1/4	30	58	17
3/8	35	70	22
1/2	40	80	26

Impulse Automation Limited
United Kingdom
Company Registration 665193

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.