



Miniature Pneumatic Valves

Kuhnke 46 Series Valve - Roller Lever


Technical information

Actuation force @ 6 bar:	Approx. 6N
Actuation stroke:	Approx. 4 mm
Pressure range:	0-12 bar
Temperature range:	-10°C...+70°C
Housing:	Brass
Seals:	Perbunan
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air



Symbol	Description	Type	Orifice	Ports	Order code
	3/2 way roller (one way) spring return normally closed	Poppet	2mm	M5	46.003
	3/2 way roller (two way) spring return normally closed	Poppet	2mm	M5	46.004

Dimensional drawings

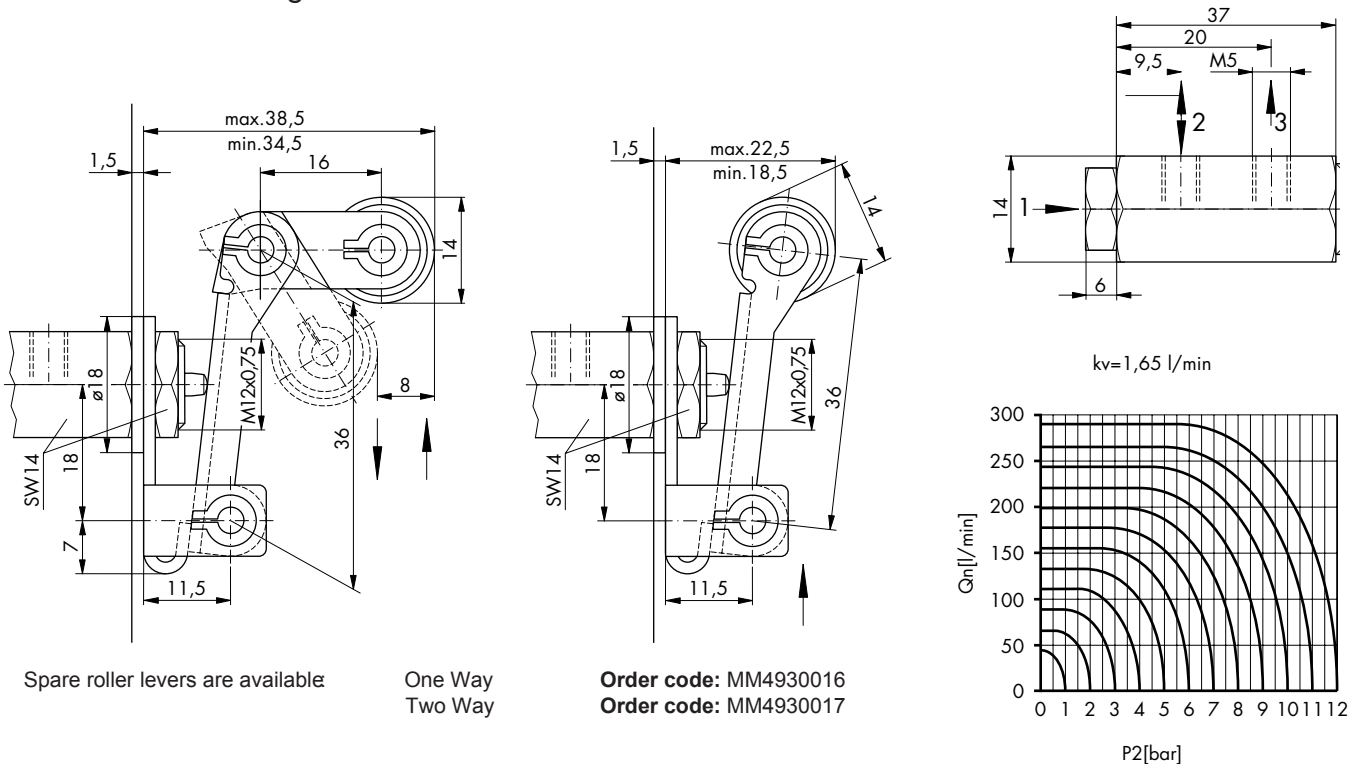

Impulse Automation Limited
United Kingdom
Company Registration 665193