

# Miniature Solenoid Valves

## Kuhnke 64 Series Valve - 3/2 Way N/C Manifold Base - Low Power


### Technical information

<b>Temperature range:</b>	-10°C...+50°C
<b>Valve type:</b>	Poppet
<b>Duty cycle:</b>	Continuous 100%
<b>Housing:</b>	Brass body, encapsulated coils
<b>Seals:</b>	NBR
<b>Lubricant:</b>	Not required.
<b>Earthing contact:</b>	Part of the standard device.
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air.





### Other information

Insert coil voltage required to complete the order code, example 64.013.24VDC.  
 Standard voltages are 12 and 24 VDC. Preferred types\*\* in 24VDC.  
 For non-preferred versions, minimum order quantities may apply.  
 Order connecting plugs separately, part number 64.230.01.  
 Subplates are available for this product, see data sheet M1008.

Symbol	Description	Max. Pressure	Coil Power	Orifice	Ports	Order code
	3/2 way spring return normally closed DC coil	8 bar	DC 1.8 W	0.5 mm	M5	<b>64.013**</b>

### Dimensional drawings

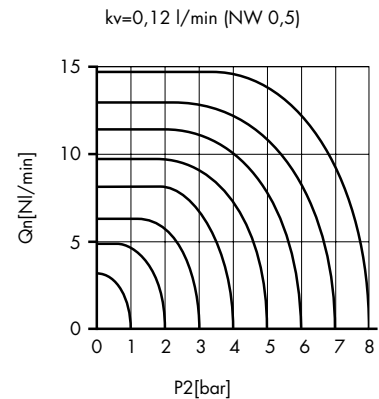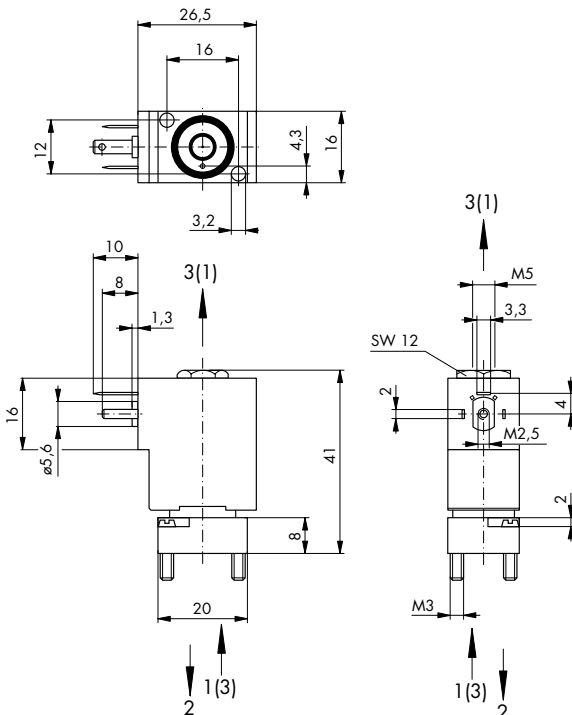

**Impulse Automation Limited**  
**United Kingdom**  
**Company Registration 665193**