

# Miniature Solenoid Valves

## Kuhnke 65 Series Valve - 3/2 Way N/C Standard Base


### Technical information

<b>Temperature range:</b>	-10°C...+60°C
<b>Valve type:</b>	Poppet
<b>Duty cycle:</b>	Continuous 100%
<b>Housing:</b>	Brass body, encapsulated coils
<b>Seals:</b>	NBR
<b>Lubricant:</b>	Not required.
<b>Earthing contact:</b>	Part of the standard device.
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air.







### Other information

Insert coil voltage required to complete the order code, example 65.111.24VDC.  
 Standard voltages are 12 and 24 VDC: 24, 110 and 230 VAC. Preferred types\*\* in 24VDC.  
 For non-preferred versions, minimum order quantities may apply.  
 Order connecting plugs separately, part number 65.495.00.

Symbol	Description	Max. Pressure	Coil Power	Orifice	Ports	Order code
	3/2 way spring return normally closed DC coil	8 bar	DC 4.5 W	1mm	M5	<b>65.111**</b>
	3/2 way spring return normally closed AC coil	8 bar	AC 5.0 VA	1mm	M5	<b>65.112</b>
	3/2 way spring return normally closed DC coil	5 bar	DC 4.5 W	1.6mm	M5	<b>65.171**</b>
	3/2 way spring return normally closed AC coil	5 bar	AC 5.0 VA	1.6mm	M5	<b>65.172</b>
	3/2 way spring return normally closed DC coil	3 bar	DC 4.5 W	2mm	M5	<b>65.231**</b>
	3/2 way spring return normally closed AC coil	3 bar	AC 5.0 VA	2mm	M5	<b>65.232</b>

### Dimensional drawings

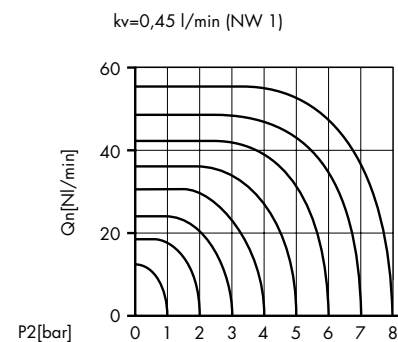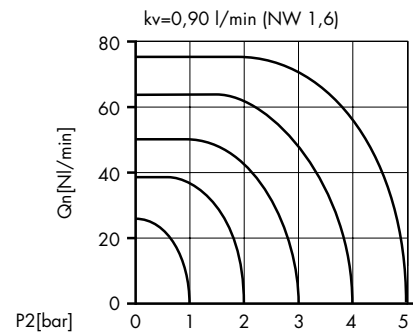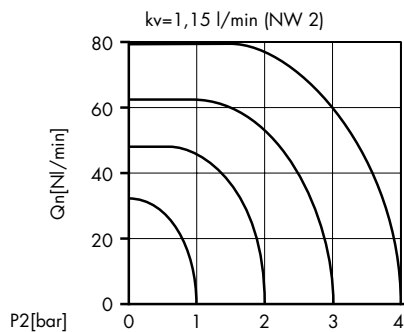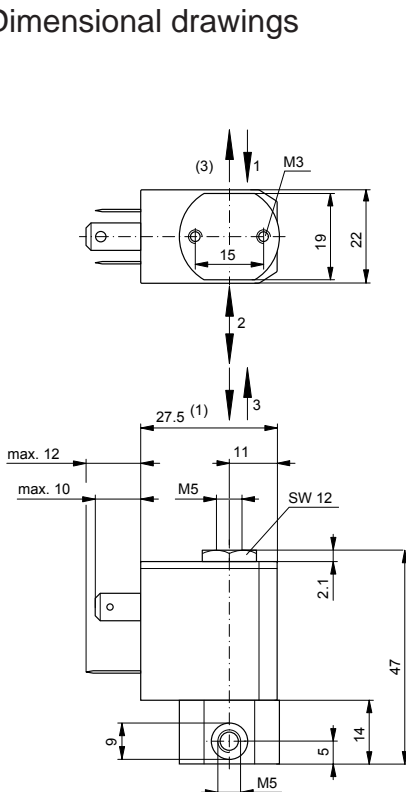

**Impulse Automation Limited**  
**United Kingdom**  
**Company Registration 665193**