

Miniature Solenoid Valves

Kuhnke 65 Series Valve - 3/2 Way N/C Screw-in Base


Technical information

Temperature range:	-10°C...+60°C
Valve type:	Poppet
Duty cycle:	Continuous 100%
Housing:	Brass body, encapsulated coils
Seals:	NBR
Lubricant:	Not required.
Earthing contact:	Part of the standard device.
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.






Other information

Insert coil voltage required to complete the order code, example 65.119.24VDC.
 Standard voltages are 12 and 24 VDC: 24, 110 and 230 VAC. Preferred types** in 24VDC.
 For non-preferred types, minimum order quantities may apply.
 Order connecting plugs separately, part number 65.495.00.

Symbol	Description	Max. Pressure	Coil Power	Orifice	Ports	Order code
	3/2 way spring return normally closed DC coil	8 bar	DC 4.5 W	1mm	M5-G1/8	65.119**
	3/2 way spring return normally closed AC coil	8 bar	AC 5.0 VA	1mm	M5-G1/8	65.120
	3/2 way spring return normally closed DC coil	5 bar	DC 4.5 W	1.6mm	M5-G1/8	65.175
	3/2 way spring return normally closed AC coil	5 bar	AC 5.0 VA	1.6mm	M5-G1/8	65.176

Dimensional drawings

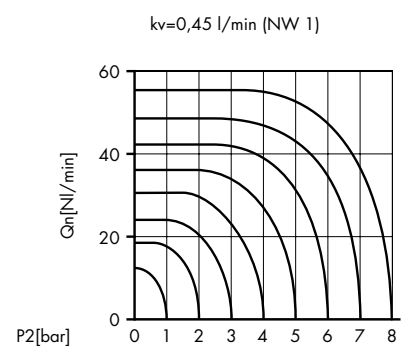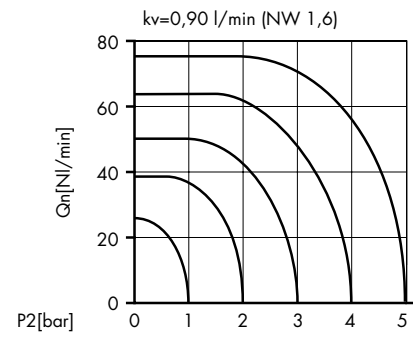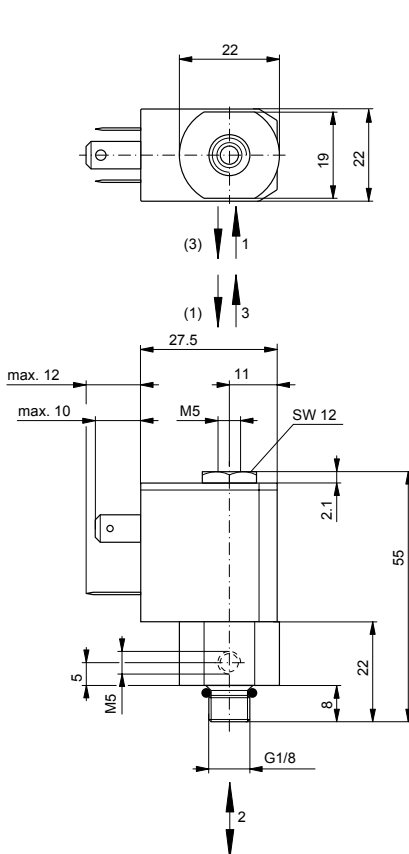

Impulse Automation Limited
United Kingdom
Company Registration 665193