

Miniature Solenoid Valves

Kuhnke 65 Series Valve - 3/2 Way N/C Manifold Base


Technical information

Temperature range:	-10°C...+60°C
Valve type:	Poppet
Duty cycle:	Continuous 100%
Housing:	Brass body, encapsulated coils
Seals:	NBR
Lubricant:	Not required.
Earthing contact:	Part of the standard device.
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.







Other information

Insert coil voltage required to complete the order code, example 65.127.24VDC.
 Standard voltages are 12 and 24 VDC: 24, 110 and 230 VAC. Preferred types** in 24VDC.
 For non-preferred types, minimum order quantities may apply.
 Order connecting plugs separately, part number 65.495.00.
 Subplates are available for this product, see data sheet M1009.

Symbol	Description	Max. Pressure	Coil Power	Orifice	Ports	Order code
	3/2 way spring return normally closed DC coil	8 bar	DC 4.5 W	1mm	M5	65.127**
	3/2 way spring return normally closed AC coil	8 bar	AC 5.0 VA	1mm	M5	65.128
	3/2 way spring return normally closed DC coil	5 bar	DC 4.5 W	1.6mm	M5	65.173
	3/2 way spring return normally closed AC coil	5 bar	AC 5.0 VA	1.6mm	M5	65.174
	3/2 way spring return normally closed DC coil	3 bar	DC 4.5 W	2mm	M5	65.235
	3/2 way spring return normally closed AC coil	3 bar	AC 5.0 VA	2mm	M5	65.236

Dimensional drawings

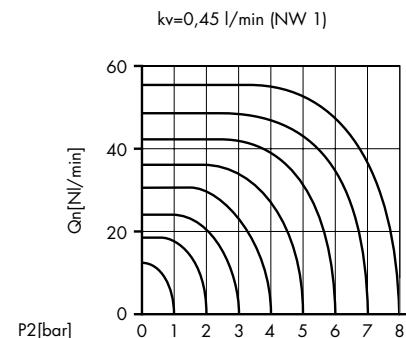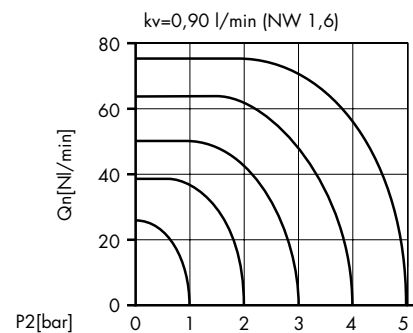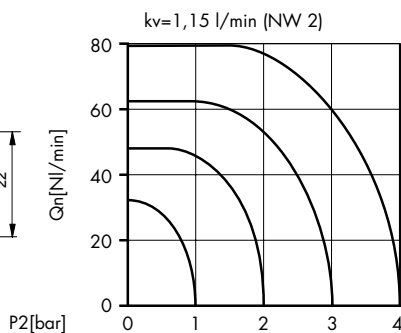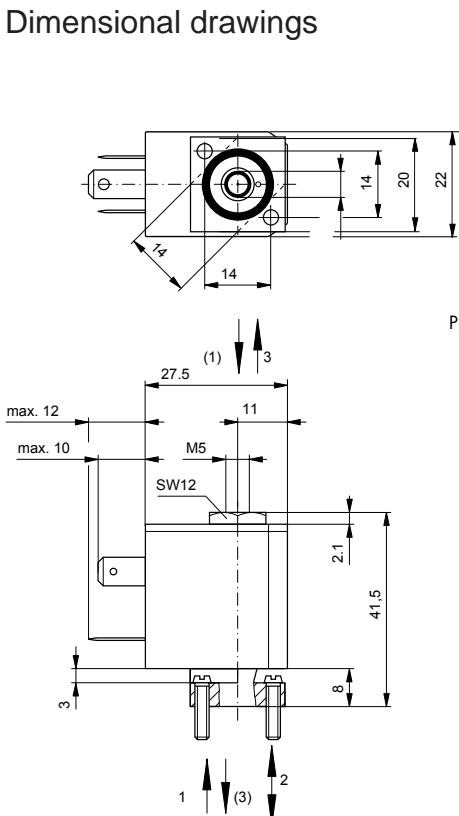

Impulse Automation Limited
United Kingdom
Company Registration 665193