

Miniature Pneumatic Valves

Kuhnke 81 Series Valve - 5/2 Way Double Pilot Operated




Technical information


Pressure range:	0-10 bar
Temperature range:	-10°C...+70°C
Housing:	Aluminium alloy/Zinc alloy/Makrolon
Spool & liner:	Steel, corrosion resistant
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.

Symbol	Description	Type	Orifice	Ports	Order code
	5/2 way double pilot	Spool	2mm	M5	81.014
	5/2 way double pilot differential pressure valve**	Spool	2mm	M5	81.016

Dimensional drawings

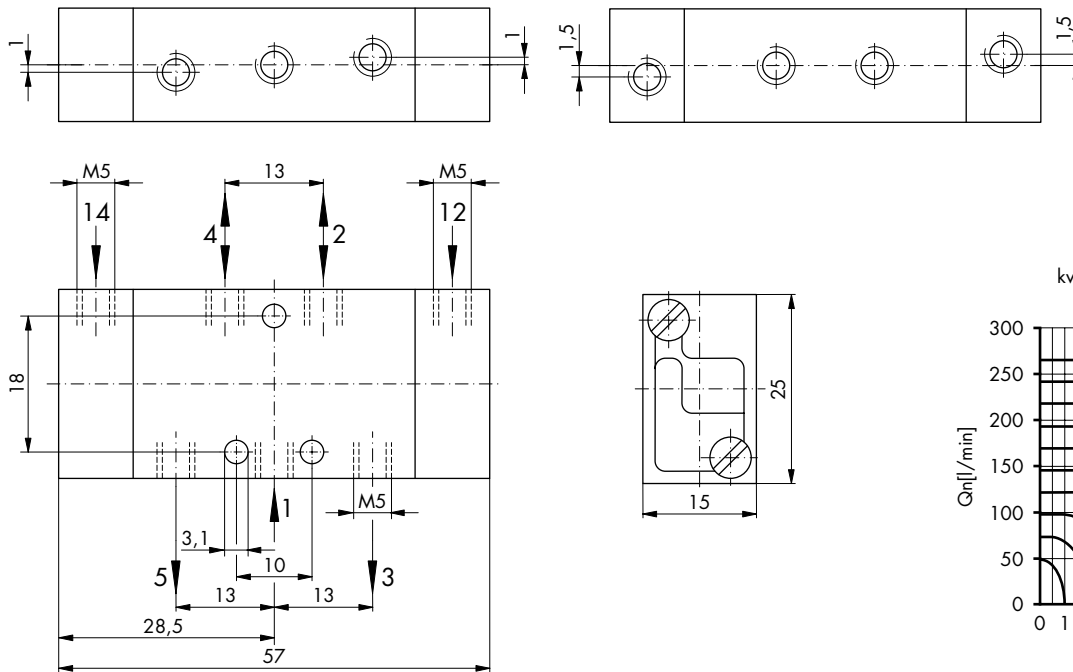

**Differential pressure valves are used in pressure compensating circuits, valves can be used to maintain pressure in balancing or levelling applications. When both pilot pressures are equalised the valve is returned by the spring.

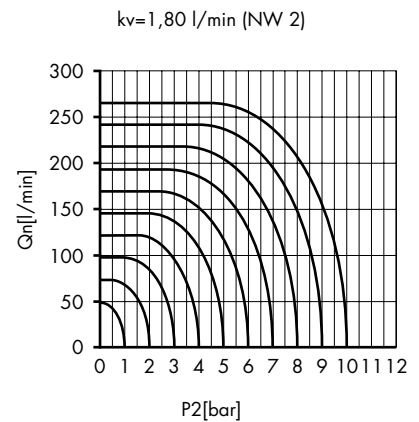

Impulse Automation Limited
 United Kingdom
 Company Registration 665193