

Miniature Pneumatic Valves

Kuhnke 84 Series Valve - 5/2 Way Manifold Mounting



Technical information

Pressure range:	0-10 bar
Temperature range:	-10°C...+70°C
Housing:	Aluminium alloy/Zinc alloy/Makrolon
Spool & liner:	Steel, corrosion resistant
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.





Other information

Subplates are available for this product, please see data sheet M1011.

Symbol	Description	Type	Orifice	Order code
	5/2 way pilot spring return	Spool	2mm	84.212
	5/2 way double pilot	Spool	2mm	84.214

Dimensional drawings

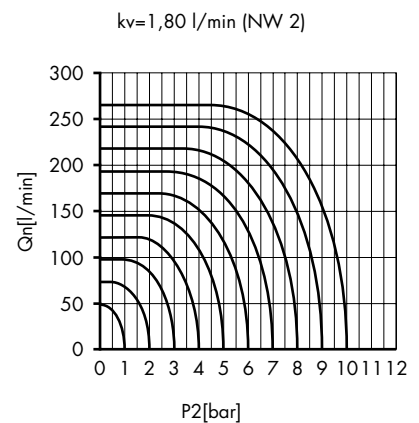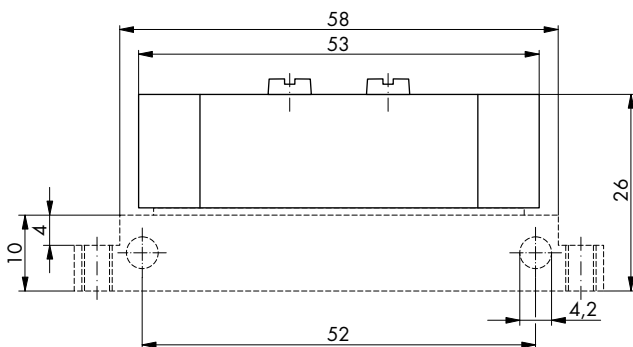

Impulse Automation Limited
 United Kingdom
 Company Registration 665193