

Logic Valves & Flow Control

Pneumatic Outlet Restrictor - Adjustable

Technical information


Pressure range: Flow rates: Temperature range: Materials: Operating medium: Max. 8 bar See graph below. -10°C...+70°C Brass body. 5 micron filtered, lubricated or non-lubricated compressed air.




Symbol	Description	Connection	Order code
	Outlet restrictor with locking nut	M5	47.200

Dimensional drawings

The outlet restrictor is used for regulating the speed of cylinders and can also can be screwed directly into the exhaust ports of miniature valves.



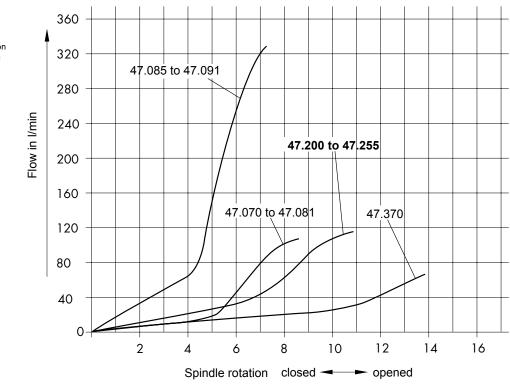

Clockwise rotation closes the restrictor.

Impulse Automation Limited United Kingdom Company Registration 665193