


Kuhnke Pneumatic Brass Cylinder

Double Acting Cylinder (Type S) Ø 5mm - 8mm

Technical information

Operating pressure:	Ø5mm 2-10 bar/Ø8mm 1.5-10 bar
Temperature range:	-10°C...+70°C
Housing/end caps:	Brass
Rod:	Cr-Ni steel
Seals:	NBR
Lubricant:	Shell Tellus C10
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.

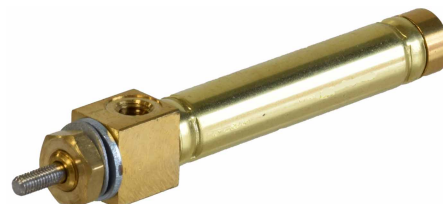

Other information:




For ATEX certification use code "X" for example 38.X.250.XXX
Mountings are available for this product, see data sheet M7200

Ø	A	B	C	D	E	F	G	Ø H	Ø I	J	K	L	M	SW	V	Max stroke available
5	8	M6x0.5	6	M2	4.5	10	M5	8	6.5	-	-	29.5	4.3	-	3	50 mm
8	6.5	M6x0.5	7.5	M3	6	10	M5	-	10	-	-	46.5	7.3	-	3	150 mm


Dimensional drawings

To order:




40.250.XXX 5mm bore + stroke
38.250.XXX 8mm bore + stroke


Example 38.250.050

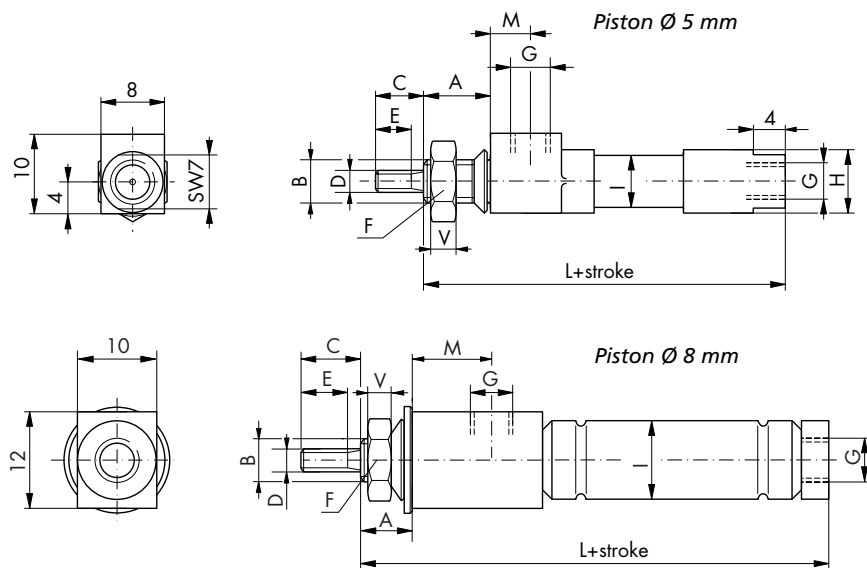

Ø 5 mm



Ø 8 mm

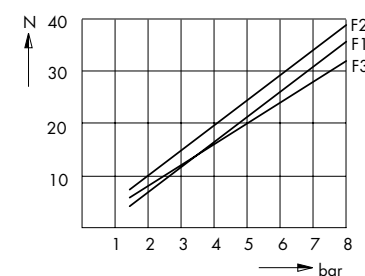

F1 = single acting cylinders
F2 = double acting cylinders in forward stroke
F3 = double acting cylinders in return stroke

Impulse Automation Limited
United Kingdom
Company Registration 665193