

Kuhnke 40.100 Pneumatic Brass Cylinder

Single Acting Micro Cylinder Ø 3mm x 6mm Stroke


Technical information

Operating pressure:	3-10 bar
Temperature range:	-10°C...+70°C
Housing/end caps:	Brass
Rod:	Cr-Ni steel
Seals:	NBR
Lubricant:	Shell Tellus C10
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.




Dimensional drawings

To order:




40.100

3mm bore x 6mm stroke

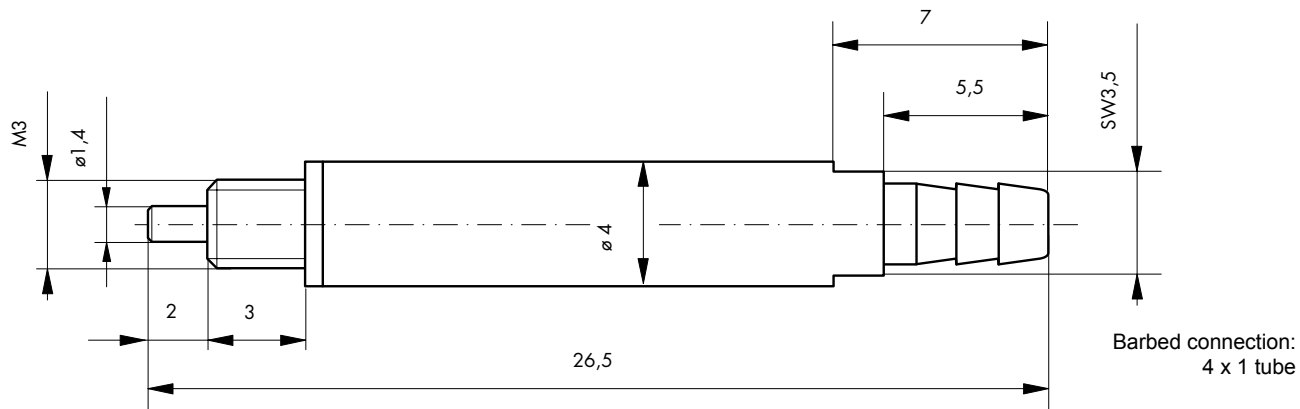

This micro cylinder with a piston diameter of only 3mm has been designed for general purpose use particularly for testing and other applications where there is restricted space.

Ø 3 mm

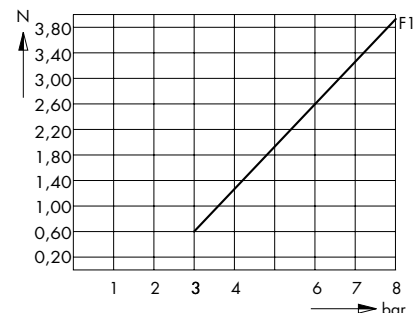

F1 = single acting cylinders

Springs are designed for the return of the piston not the coupled mass.

Impulse Automation Limited
United Kingdom
Company Registration 665193