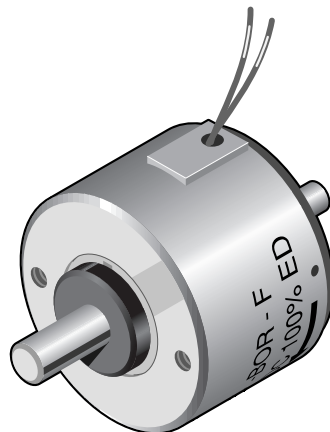


D5 Series Rotary Solenoid

Voltage rating	V DC	24					205					V DC	Voltage rating
ED* LK	%	100	44	21	13	5	100	35	22	13	5	%	ED* LK
Current rating	mA	420	875	1.740	2.760	6.490	45	127	195	322	840	mA	Current rating
Nominal resistance	Ω	57,4	27,4	13,8	8,7	3,7	4.546	1.613	1.050	636	244	Ω	Nominal resistance
D 52, 25°	MA Ncm	6,8	11,4	16,0	18,5	23,5	5,8	11,5	14,5	17,5	23,0	Ncm MA	D 52, 25°
	ME Ncm	11,5	15,3	19,0	21,3	26,0	10,5	15,4	17,5	21,0	25,0	Ncm ME	
D 53, 35°	MA Ncm	5,2	9,4	13,5	16,0	22,0	4,4	9,5	12,2	15,2	21,0	Ncm MA	D 53, 35°
	ME Ncm	10,2	13,5	16,0	17,5	20,0	9,4	13,6	15,2	17,0	19,5	Ncm ME	
D 54, 45°	MA Ncm	3,6	6,8	11,0	13,8	18,8	3,1	6,9	9,6	12,5	18,0	Ncm MA	D 54, 45°
	ME Ncm	9,3	12,5	14,5	16,0	18,0	8,6	12,5	14,0	15,5	17,7	Ncm ME	
D 56, 65°	MA Ncm	2,2	4,4	8,1	10,3	15,5	1,9	4,5	6,7	9,8	14,5	Ncm MA	D 56, 65°
	ME Ncm	8,6	11,5	13,5	14,3	15,0	8,1	11,6	12,8	14,0	15,0	Ncm ME	
D 59, 95°	MA Ncm	0,8	2,2	4,1	5,6	9,8	0,6	2,2	3,3	5,1	9,1	Ncm MA	D 59, 95°
	ME Ncm	7,2	8,9	9,8	9,8	9,2	6,6	9,0	9,6	9,8	9,2	Ncm ME	

* By using a cooling surface $\geq 300 \text{ cm}^2$, the permissible duty cycle can be extended up to 1.7x normal rating

MA = Initial torque
ME = End torque (5° before end of rotary angle)

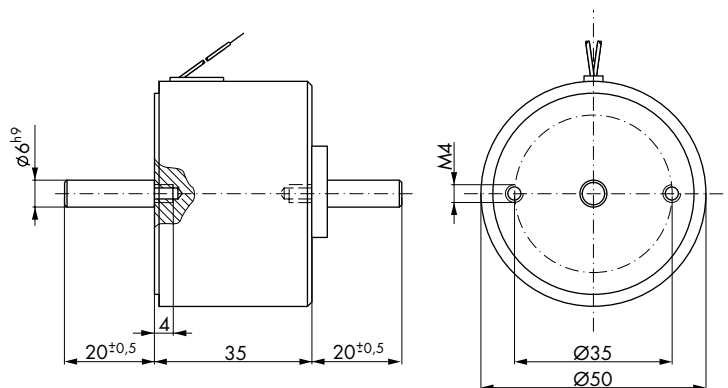


Coil terminals: - Flying leads
- Solder terminal box (6.3 DIN 46247)

Weight: appr. 380 g
Dyn. moment of inertia (rotational mass): appr. $1.8 \cdot 10^{-6} \text{ kg m}^2$
Time constant: appr. 8–25 ms

All solenoids with MA > 2.5 Ncm are available with spring return, with a rating of MR = 2.0 Ncm approximately.

The operational voltage of 205 V DC results from rectifying 230 V AC with a bridge rectifier.




Impulse Automation Limited
United Kingdom
Company Registration 665193

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.


D5 Series Ordering Information

D	5	3	-ROR-	- N -	24 V DC	100 % ED	Order specifications
D							Rotary solenoids
	5						
							Angular travel
		2					25°
		3					35°
		4					45°
		6					65°
		9					95°
			-ROR-				Shaft and rotation options
							Coil terminals
				F			Flying leads (20 cm standard length)
				N			Terminal box ³⁾
							Nominal voltage
					24		Standard voltage
					205		(connected to 230 V AC with Si-bridge rectifier)
						100 % ED	Perm. duty cycle under air cooled conditions (LK)

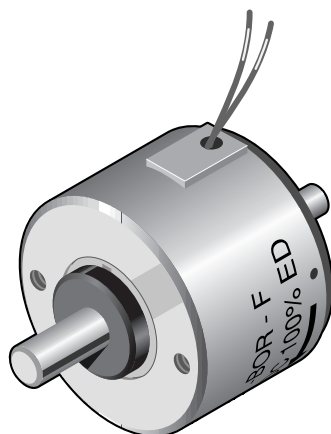³⁾ Suits push-on connector 6.3 DIN 46247 and plug-in socket No. Z801.



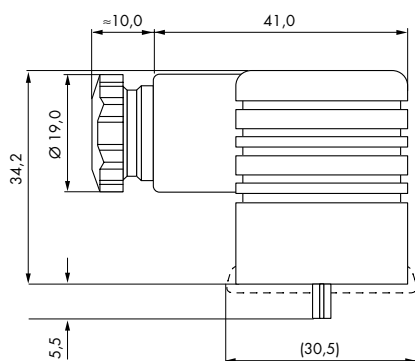Insulation class: B (max. permissible temperature = 130 °C)
Test voltage: 2500 V (eff)
(D 2: 1500 eff)
Accessories: Plug-in socket Z801



Plug-in socket Z801
Screw joint PG 9
for lead diameter 4.5 - 7 mm

Plug-in socket Z811
Screw joint PG 11
for lead diameter 6 - 9 mm
Plug-in socket with built in Si-bridge rectifier



Impulse Automation Limited
United Kingdom
Company Registration 665193

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions.
The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.

D5 Series Shaft & Rotation Options

Shaft designs

The following types of rotary solenoids are available.
Resulting in the following abbreviations for ordering:

1. letter

Direction of rotation (facing the output shaft)

- L** anti-clockwise rotation
- R** clockwise rotation
- B** shaft extensions both ends

2. letter

Centering shoulder

- O** standard type without mounting ring
- R** optional
- L** optional

3. letter

Return spring – the torque exerted by the spring is to be subtracted from the torque values given in the data sheets

- L** on the anti-clockwise shaft end
- R** on the clockwise shaft end
- O** no return spring fitted
- B** both sides

Example 1










anti-clockwise rotation, no return spring, standard shaft length
LOO -



Example 2

shaft extensions on both ends, return spring on anti-clockwise rotation end
BOL -

Spring return arrangement
(with protection cap)

Mounting ring

Normal	Spring return
	
	
	
	
	
	



Dimensions in mm	Solenoid size
	D5
Ø D	21,0
L _F	6,0
Ø D _{h10}	19,0
L _Z	3,0

Impulse Automation Limited
United Kingdom
Company Registration 665193

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions.
The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.