

Kuhnke Pneumatic Rotary Actuator

35mm Diameter - Double Acting


Technical information

Pressure range:	2-8 bar
Temperature range:	-10°C...+70°C
Stroke volume:	Approx. 7 cm ³ (One switching cycle/forward and return).
Angular travel:	90°+5°
Housing/shaft:	Aluminium alloy/CrNi steel
Seals:	Perbunan
Lubricant:	Shell Tellus C10
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.





Other information

The angle of rotation can be limited by fitting an external stop.

Symbol	Description	Ports	Order code
	Rotary actuator double acting	M5	701.010

Dimensional drawings

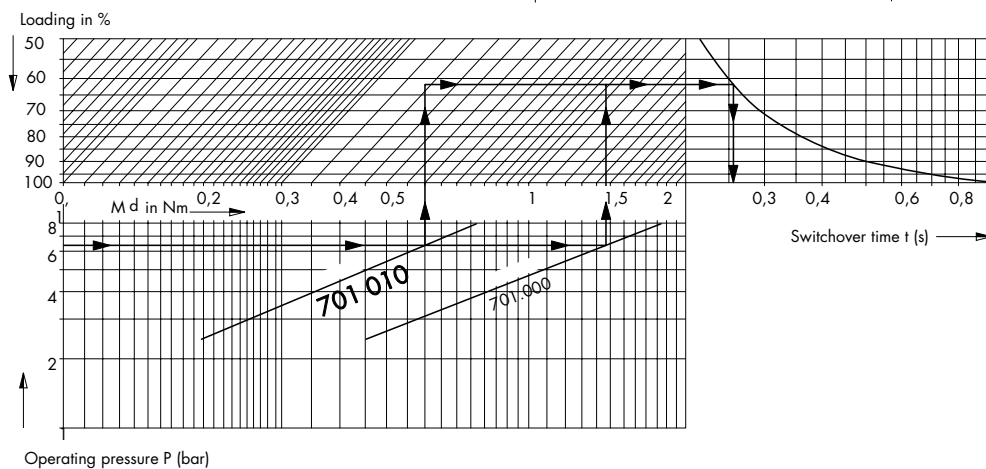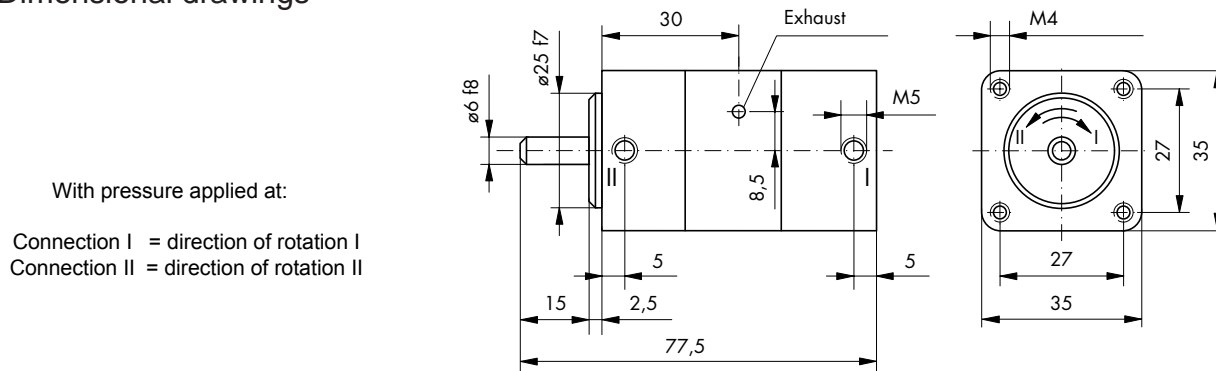

Impulse Automation Limited
United Kingdom
Company Registration 665193