

# Solenoid Operated Pneumatic Valves

## 5/2 & 5/3 Double Solenoid Control Valve G1/8 Ports

### Technical information

<b>Pressure range:</b>	2.5-10 bar
<b>Temperature range:</b>	-15°C...+50°C
<b>Housing:</b>	Die cast and lacquered aluminium alloy
<b>Seals:</b>	NBR
<b>Lubricant:</b>	Not required
<b>Earthing contact:</b>	Part of the standard device.
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air




### Other information



For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX  
 For NPT ports use prefix code "75" for example 75.XXX.XX.XX  
 Order coils & connecting plugs separately, see data sheet M1002.

Symbol	Description	Type	Orifice	Ports	Order code
	5/2 way double solenoid	Poppet	6mm	G1/8	<b>76.027.95.00</b>
	5/2 way double solenoid	Spool	6mm	G1/8	<b>76.023.95.00</b>
	5/3 way spring return to centre all ports closed	Spool	6mm	G1/8	<b>76.024.15.00</b>
	5/3 way spring return to centre, ports 2 & 4 exhaust	Spool	6mm	G1/8	<b>76.024.05.00</b>

### Dimensional drawings

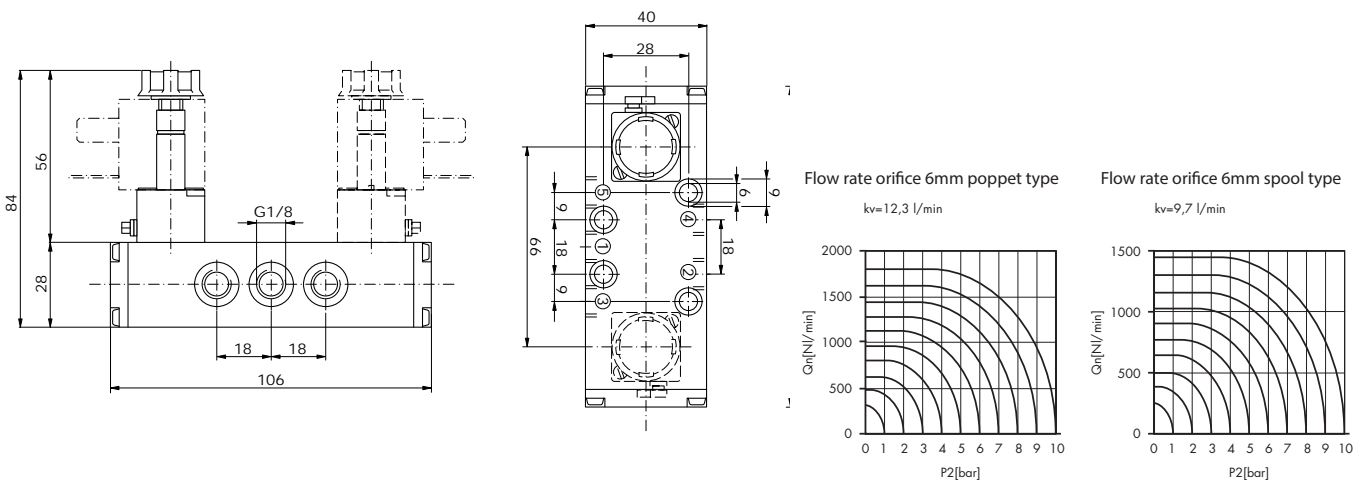

**Impulse Automation Limited**  
**United Kingdom**  
**Company Registration 665193**