

Manually Operated Pneumatic Valves

Pneumatic Lever Valve 5/3 Way Angled Lever G1/4 Ports

Technical information



Pressure range: 0-10 bar
Temperature range: -15°C...+50°C
Housing: Glass fibre reinforced PPA
Seals: NBR
Lubricant: Not required
Operating medium: 5 micron filtered, lubricated or non-lubricated compressed air.

Centre Ports Closed





Other information

For NPT ports use prefix code "75" for example 75.XXX.XX.XX
 Bellows available 76.420.00.55 (5 pcs)

| Symbol | Description | Type | Orifice | Ports | Lever | Order code |
|---|---------------------------------|-------|---------|-------|-------|---------------------|
|  | 5/3 way spring return to centre | Spool | 8mm | G1/4 | Black | 76.144.25.38 |
|  | 5/3 way maintained position | Spool | 8mm | G1/4 | Black | 76.144.25.39 |

Dimensional drawings

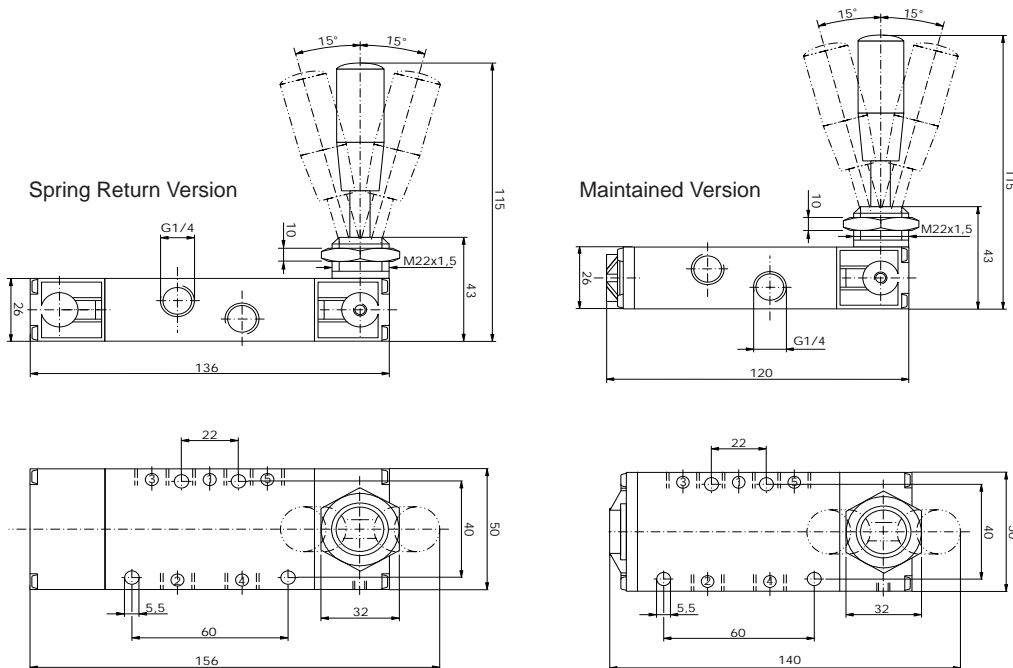

Impulse Automation Limited
United Kingdom
Company Registration 665193

Information shown in these data sheets are for guidance purposes only, no liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper use of these parts, assemblies or equipment described.