

Solenoid Operated Pneumatic Valves

5/2 Way Single & Double Solenoid Control Valve G1/2 Ports

Technical information



Pressure range: 2.5-10 bar
Temperature range: -15°C...+50°C
Housing: Lacquered aluminium alloy
Seals: NBR
Lubricant: Not required
Earthing contact: Part of the standard device.
Operating medium: 5 micron filtered, lubricated or non-lubricated compressed air




Other information



For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
 For NPT ports use prefix code "75" for example 75.XXX.XX.XX
 Order coils & connecting plugs separately, see data sheet M1002.


Symbol	Description	Type	Orifice	Ports	Order code
	5/2 way spring return	Poppet	15mm	G1/2	76.067.91.00
	5/2 way double solenoid	Poppet	15mm	G1/2	76.067.92.00

Dimensional drawings

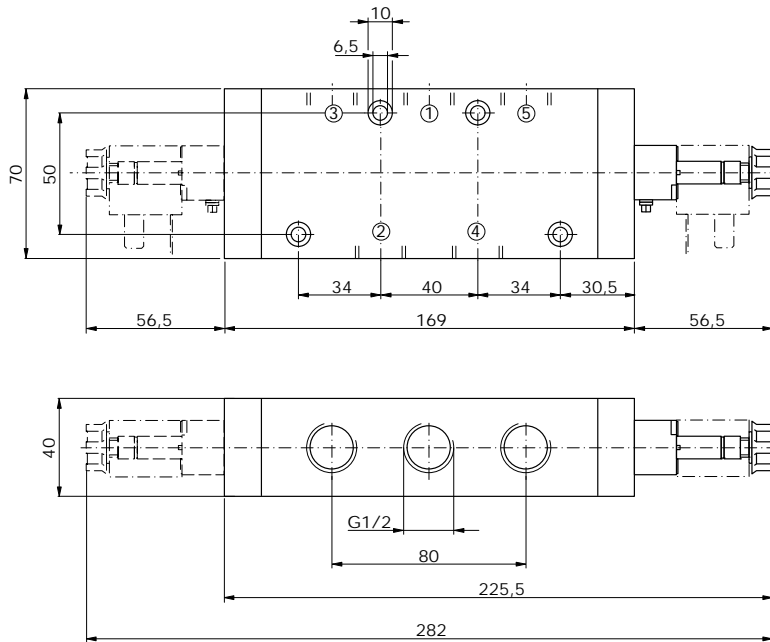

Flow rate orifice 15mm poppet type

kv=68,80 l/min



Impulse Automation Limited
 United Kingdom
 Company Registration 665193