

PulseTech Micro Pneumatic Valves


Rotary Selector Actuators

Technical information

Temperature range:	Max. +55°C
IP Rating:	IP55
Housing:	High performance plastic material
Mechanical Lifetime	500,000 actuations


Other information

Minimum order quantities may apply.

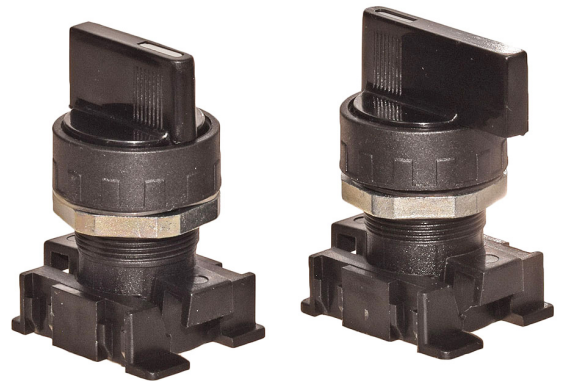



Description	Function	Order code
Short lever selector two positions [bistable]	0 1	PT.00.59.7.00
Short lever selector two positions [monostable]	0 ← 1	PT.00.59.5.00
Short lever selector three positions [bistable]	2 0 1	PT.00.59.8.00
Short lever selector three positions [monostable]	2 → 0 ← 1	PT.00.59.6.00
Long lever selector two positions [bistable]	0 1	PT.00.59.7.10
Long lever selector two positions [monostable]	0 ← 1	PT.00.59.5.10
Long lever selector three positions [bistable]	2 0 1	PT.00.59.8.10
Long lever selector three positions [monostable]	2 → 0 ← 1	PT.00.59.6.10

Dimensional drawings

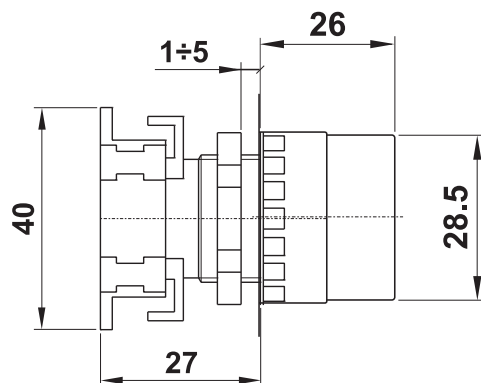

→ Spring return direction
←

Panel cutout with anti-rotation feature.

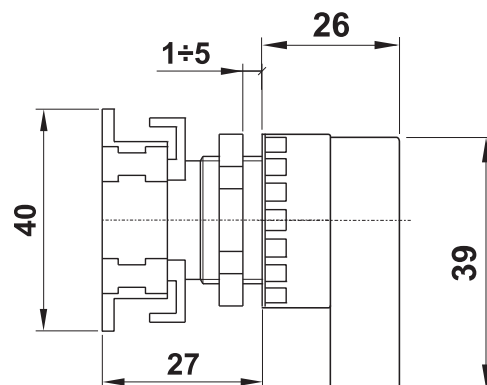

Part Number	Rotary Selector Position	Valve Position 1	Valve Position 2
PT.00.59.6.XX	2	Actuated	No Function
PT.00.59.8.XX	0	No Function	No Function
	1	No Function	Actuated
PT.00.59.5.XX	0	No Function	No Function
PT.00.59.7.XX	1	Actuated	Actuated

Impulse Automation Limited
United Kingdom
Company Registration 665193