

Pneumatic Air Preparation

Lubricator G1/2 & G1 Ports


Technical information

Max. pressure:	12.5 bar
Temperature range:	5 to 55 °C
Flow rate (P = 6.3 bar):	G1/2 ports 3000 NI/min / G1 ports 12000 NI/min
Bowl capacity:	G1/2 ports 140 cc / G1 ports 440 cc
Viscosity:	Recommended ISO VG32
Material:	Transparent toughened Polyamide bowl with outer guard




Description	Ports	Order code
Lubricator G1/2 ports	G1/2	L2STP
Lubricator G1 ports	G1	L10STP

Dimensional drawings

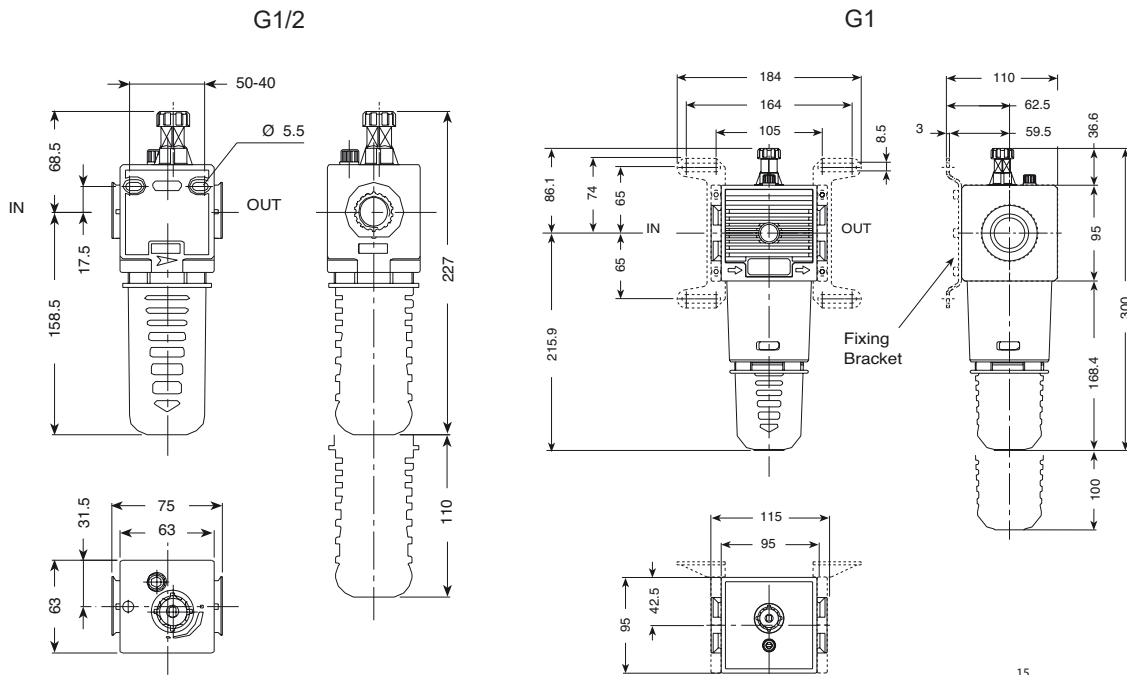

Mounting Bracket (G1)

Order code: **SQG**



Impulse Automation Limited
United Kingdom
Company Registration 665193