


Profile Cylinder Sensor & Seal Kits

REED Type Sensor

Position Transmitter REED (2 wires)




Switching output:	N.O.
Switching capacity:	Max. 10 VA
Switching voltage:	3-230 V AC/DC
Switching current:	Max. 500 mA
Switching time:	0.5 ms
Service life:	107 operations, depending on the load
Housing material:	Plastic
Protection class:	IP67
Temperature range:	-20°C to +85°C
Status indicator:	LED



Dimensional drawings



Code	Description
33.18.115	with cable L = 3000 mm

Order fastening clamps separately

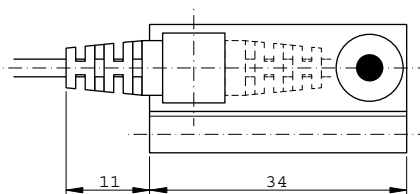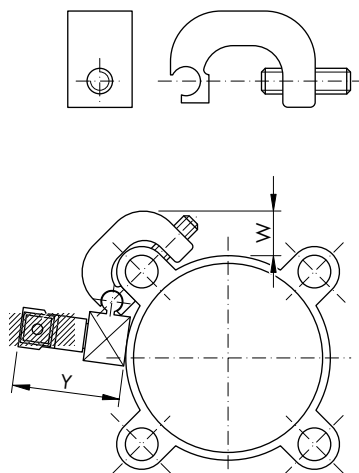

Seal Kit for VD Versions (non-magnetic piston)

Seal Kit for VF Versions (magnetic piston)

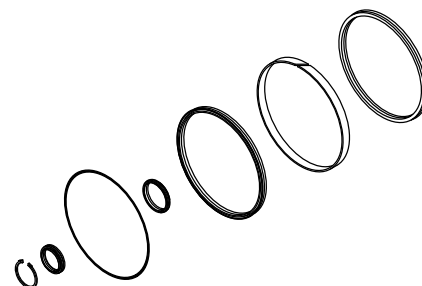

Fastening Clamps

Order No.	Ø	Y	W
33.009.07	125	25	15
33.009.19	160 - 200	25	23

Ø	Code
125	SG.125VD.DOM
160	SG.160VD.DOM
200	SG.200VD.DOM
250	SG.250VD.DOM
320	SG.320VD.DOM

Ø	Code
125	SG.125VF.DOM
160	SG.160VF.DOM
200	SG.200VF.DOM
250	SG.250VF.DOM
320	SG.320VF.DOM

Impulse Automation Limited
United Kingdom
Company Registration 665193